
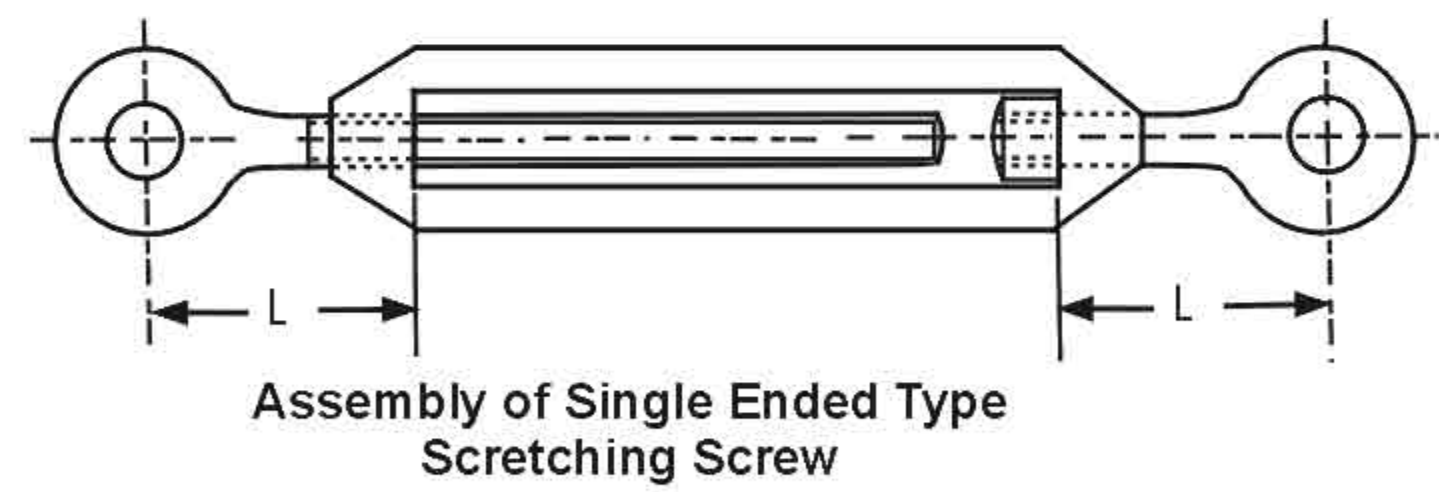
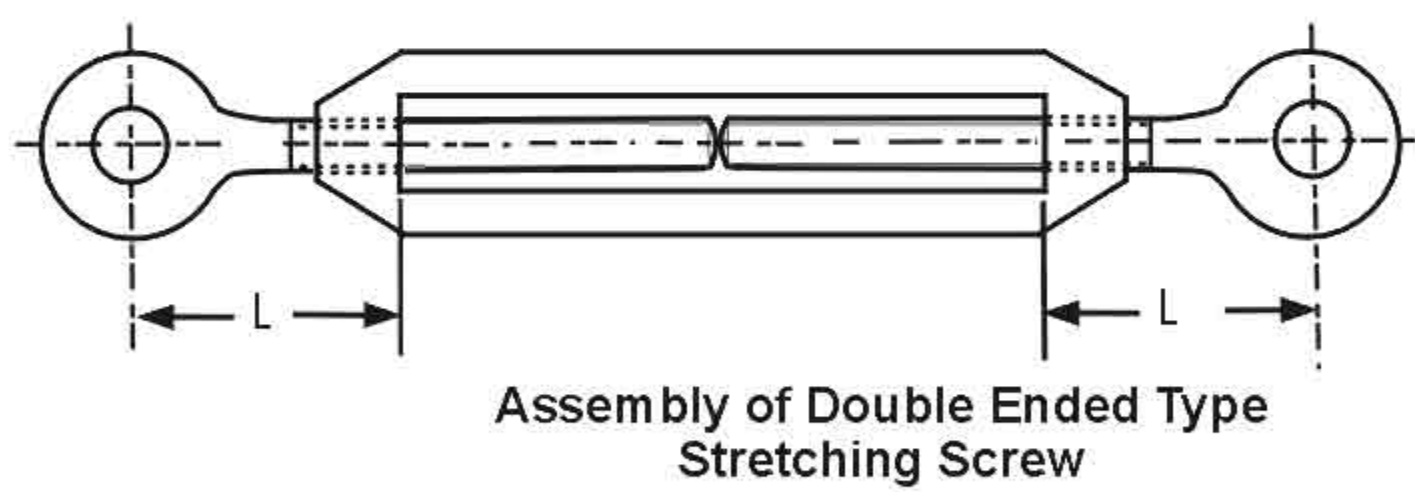
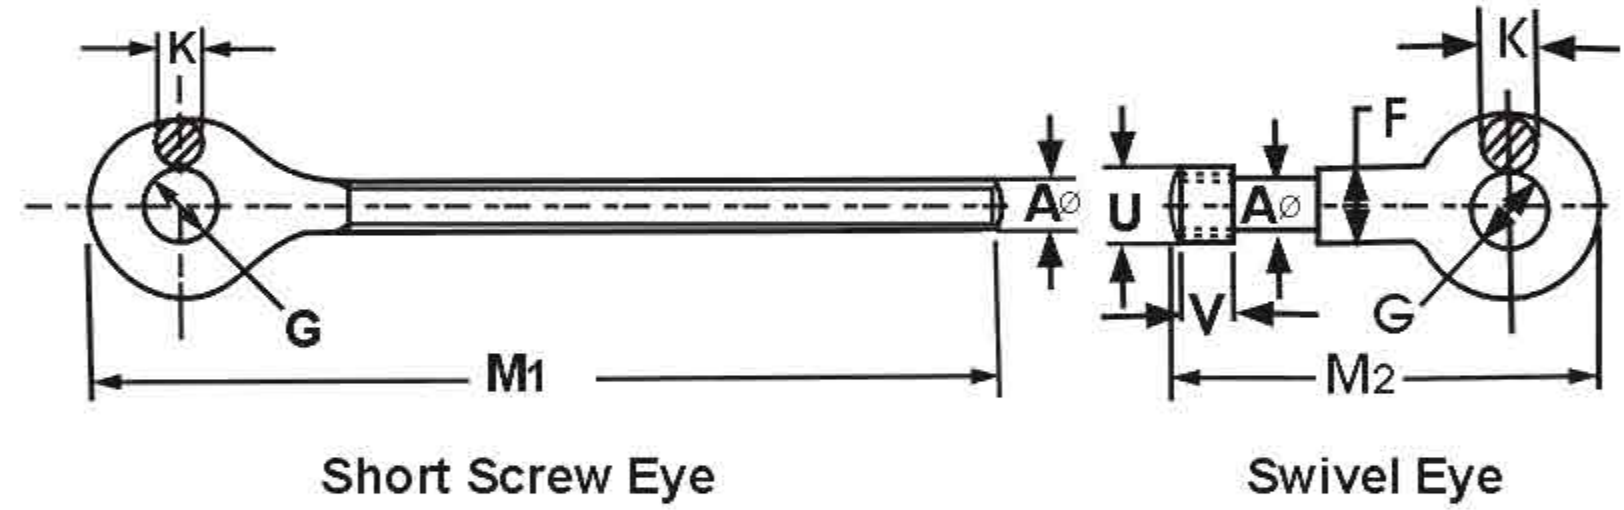
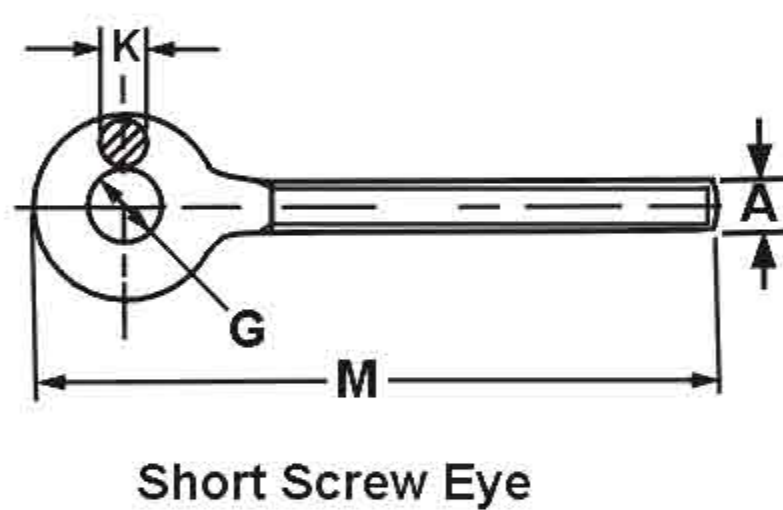


IS: 3121 - 1965

An open body consisting of two reins connecting a box at each end, with a central hole threaded in opposite hand, into which fittings of optional form (for example, stud eye, elongated eye, screwed fork jaw) having screwed shanks are fitted.

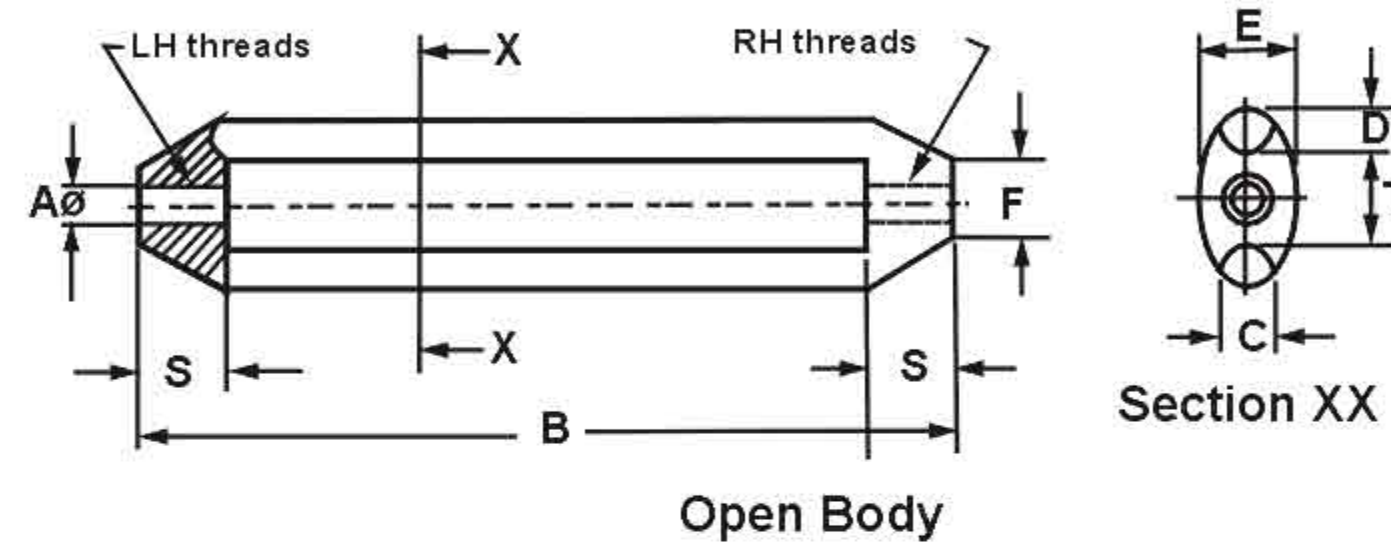

Nominal size	Assembly and body								Screw eyes and Swivel eyes							Proof Load	Max. Safe Working Load
A	B	C	D	E	F	L	S	T	G	K	M	M1	M2	U	V	kg	kg
M6	100	6	5	12	9	32	10	11	9	6	80	105	50	6	5	200	100
M8	125	8	6	16	13	35	13	13	13	8	100	140	60	11	8	300	150
M10	160	10	8	19	15	45	15	15	16	10	130	180	75	13	10	600	300
M12	200	12	10	22	19	54	18	18	19	12	150	220	90	17	13	900	450
M14	225	15	12	25	22	60	21	22	22	12	175	250	105	19	14	1200	600
M16	250	18	14	29	24	66	24	24	24	14	200	275	115	22	16	1520	760
M20	315	20	16	33	30	80	30	30	30	16	230	325	135	26	20	2240	1120
M22	355	22	18	41	33	88	32	32	33	18	270	390	155	30	22	3240	1620
M24	400	24	20	43	36	100	35	35	36	18	310	435	175	34	24	4000	2000
M30	450	30	22	50	45	120	42	42	44	24	350	500	210	40	30	6300	3150
M36	450	36	28	60	55	135	50	50	52	28	380	510	250	49	36	9000	4500
M45	450	40	36	75	58	165	60	60	67	35	415	535	300	58	45	14200	7100
M52	450	45	40	100	75	190	70	70	80	42	450	535	340	65	52	19000	9500

(All dimensions in millimeters)