



Estd. 1910

Esoofali Esmailji Karachiwala & Co.

43/45 Narayanrao Koli Marg (Bhandari St.), Masjid Bunder (W), Mumbai 400003. INDIA.

Tel: +91-22-23444586 / 23421617 / 23450667 / 23429167 | GST No: 27AAAFE2712M1ZK

Email: sales@eekarachiwala.com Web: www.eekarachiwala.com

Agents for: Usha Martin Wire Ropes, Slingset Polyester Slings, Ferreteria, Vankos Hydraulic Jacks, Powerfull Chain Pulley Blocks, Tuff PP Ropes, Channel Partners for Crosby and Gunnebo Lifting Tackles.



WARNING

DO NOT EXCEED WORKING LOAD LIMIT.
USE CERTIFIED RIGGING WITH RIGHT SIZE OF WIRE ROPE & CHAIN

Turn Buckles Federal Specification



**EEK -223
HOOK & HOOK**



**EEK -225
HOOK & EYE**



**EEK -226
EYE & EYE**



**EEK -227
JAW & EYE**




**EEK -228
JAW & JAW**

Nominal size * inch	l ₁ mm	l ₂ mm	m mm	e mm	a mm	b mm	f mm	w mm	h mm	g mm	k mm	Working Load Limit (Kg)		Weight Per Piece (Kg)		
												Eye & Eye Eye & Jaw Jaw & Jaw	Hook & Hook Hook & Eye Jaw & Jaw	Eye & Eye Hook & Eye Hook & Hook	Jaw & Eye	Jaw & Jaw
3/4 x 6	180	152	12	129	28	13	137	12	22	1 1/8	137	540	450	0,39	0,42	0,45
1/2 x 6	190	152	15	147	36	18	153	16	27	1 1/8	147	1000	680	0,67	0,72	0,76
1/2 x 9	266	228	15	187	36	18	193	16	27	1 1/8	187	1000	680	0,84	0,89	0,93
1/2 x 12	342	304	15	222	36	18	228	16	27	1 1/8	222	1000	680	1,01	1,06	1,10
5/8 x 6	200	152	20	166	44	22	177	19	33	1 1/2	161	1590	1020	1,07	1,16	1,25
5/8 x 9	276	228	20	206	44	22	217	19	33	1 1/2	201	1590	1020	1,31	1,40	1,49
5/8 x 12	352	304	20	241	44	22	252	19	33	1 1/2	236	1590	1020	1,55	1,64	1,73
5/8 x 18	505	457	-	-	-	-	-	19	33	1 1/2	316	1590	-	-	-	2,21
3/4 x 6	210	152	23	181	54	25	196	23	38	1 1/2	173	2360	1360	1,75	1,89	2,03
3/4 x 9	287	228	23	221	54	25	236	23	38	1 1/2	213	2360	1360	2,09	2,23	2,37
3/4 x 12	362	304	23	256	54	25	271	23	38	1 1/2	248	2360	1360	2,42	2,56	2,70
3/4 x 18	515	457	23	336	54	25	351	23	38	1 1/2	328	2360	1360	3,08	3,22	3,36
7/8 x 12	372	304	26	273	60	31	287	28	44	1 3/4	266	3270	1810	3,56	3,80	4,04
7/8 x 18	524	457	26	353	60	31	367	28	44	1 3/4	346	3270	1810	4,43	4,67	4,91
1 x 12	381	304	29	286	76	36	323	30	52	1 7/8	286	4540	2270	5,05	5,33	5,61
1 x 18	533	457	29	366	76	36	403	30	52	1 7/8	366	4540	2270	6,25	6,53	6,81
1 1/4 x 12	387	304	-	-	90	46	360	44	71	1 7/8	330	6890	-	8,60	9,20	9,80
1 1/4 x 18	540	457	-	-	90	46	440	44	71	1 7/8	380	6890	-	10,40	11,00	11,60
1 1/4 x 24	693	610	-	-	90	46	495	44	71	1 7/8	479	6890	-	12,20	12,90	13,60
1 1/2 x 12	400	304	-	-	104	54	390	52	71	1 7/8	360	9710	-	13,20	14,30	15,40
1 1/2 x 18	550	457	-	-	104	54	465	52	71	1 7/8	430	9710	-	15,82	16,92	18,02
1 1/2 x 24	703	610	-	-	104	54	540	52	71	1 7/8	496	9710	-	18,00	18,70	19,30
1 3/4 x 18	570	457	-	-	-	-	-	60	86	1 3/4	440	12700	-	-	-	23,56
1 3/4 x 24	720	610	-	-	117	59	577	60	86	1 3/4	500	12700	-	26,00	27,50	26,81
2 x 24	735	610	-	-	143	67	632	64	95	2 1/2	540	16780	-	37,58	40,80	45,04
2 1/2 x 24	800	610	-	-	-	-	-	73	113	2 1/2	580	27220	-	-	-	72,32

* Proof load is 2 times Working Load Limit. Ultimate Load is 5 times Working Load Limit.

Specifications given are indicative and are subject to change.

- Galvanized steel.
- Turnbuckle eyes are forged and elongated, by design, to maximize easy attachment in system and minimize stress in the eye. For turnbuckle size 1/4" through 2 1/2" a shackle one size smaller can be reeved through eye.
- Modified BSW thread for improved fatigue properties.
- Lock Nuts available for all sizes
- End fittings are Quenched and Tempered, bodies heat treated by normalizing

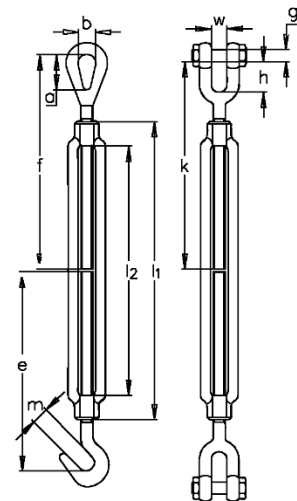

TURNBUCKLES RECOMMENDED FOR STRAIGHT OR IN-LINE PULL ONLY.