


Spelter Sockets


OPEN SPELTER SOCKETS

Wire Rope Dia (mm)	Dimensions in mm								Weight in kg
	A	C	D	F	J	L	M	N	
6	116	18	19	10	57	40	33	8	0.3
8-10	124	21	22	13	57	44	40	11	0.6
11-13	141	25	25	14	64	51	49	13	1.0
14-16	171	32	30	18	76	64	57	14	2
19	202	38	35	21	89	76	67	16	2
22	235	44	41	25	102	89	80	19	4
25	268	51	51	29	114	102	95	22	7
29	300	57	57	32	127	114	105	25	10
32-35	335	64	64	38	140	127	121	29	14
38	384	76	70	41	152	152	137	30	21
41	413	76	76	44	165	165	146	33	27
44-48	464	89	89	51	191	178	165	40	38
51-54	546	102	95	57	216	229	178	46	57
57-60	597	114	108	65	229	254	197	54	76
64-67	648	127	121	73	248	273	216	60	114
70-73	692	133	127	79	279	279	229	73	143
76-79	737	146	133	86	305	286	241	76	172
83-86	784	159	140	92	330	298	254	79	197
89-92	845	171	152	99	356	318	273	83	255
95-102	921	191	178	108	381	343	318	89	355

OPEN SPELTER SOCKETS

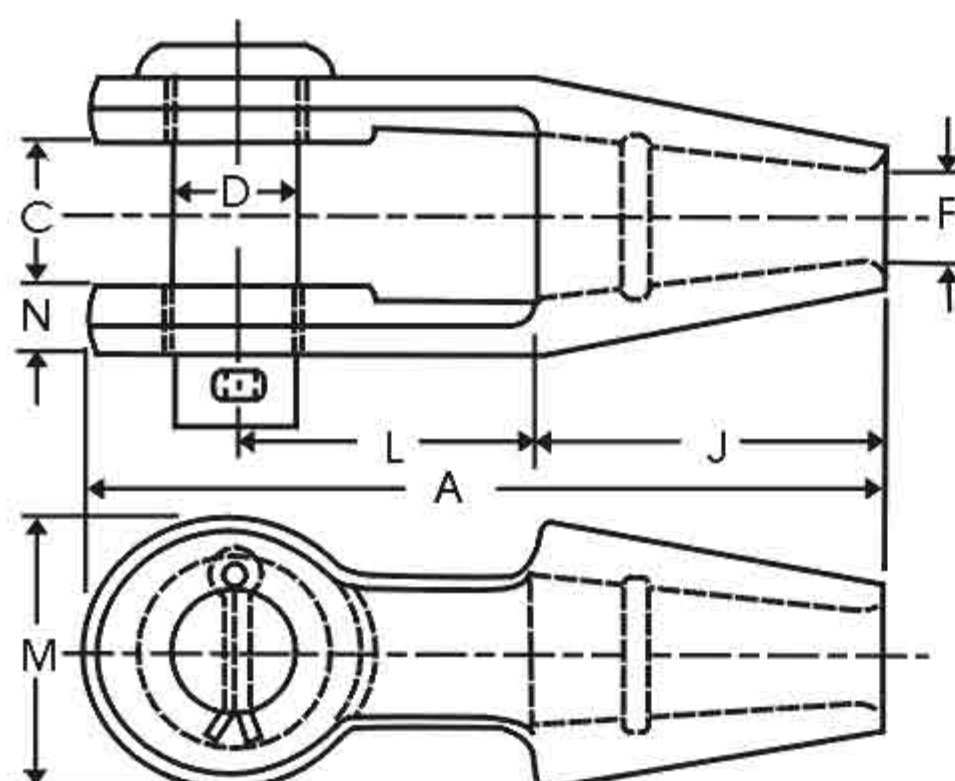

CLOSED SPELTER SOCKETS

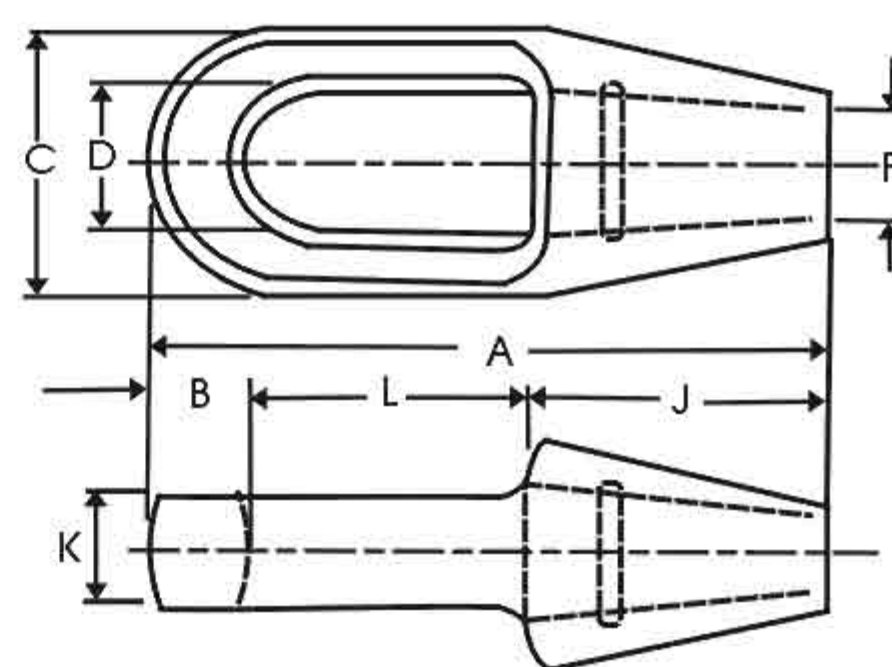

CLOSED SPELTER SOCKETS

Wire Rope Dia(mm)	Dimensions in mm								Weight in kg
	A	B	C	D	F	J	K	L	
6	116	13	38	21	10	57	13	13	0.2
8-10	125	16	43	24	13	57	18	19	0.3
11-13	140	18	51	29	14	64	22	38	0.7
14-16	162	21	67	35	18	76	25	64	1
19	194	27	76	41	21	89	32	108	2
22	226	33	92	48	25	102	38	184	3
25	254	37	105	57	29	114	44	267	5
29	283	40	114	64	32	127	51	362	6
32-35	313	43	127	70	38	140	57	502	9
38	359	76	137	80	41	152	64	711	13
41	391	54	146	83	44	165	70	972	17
44-48	445	56	171	90	51	191	76	1454	26
51-54	502	62	194	96	57	216	83	1962	35
57-60	549	73	216	109	64	229	92	2667	48
64-67	597	79	241	140	73	248	102	3556	64
70-73	648	76	273	159	79	279	124	5588	100
76-79	686	83	292	171	86	305	133	7010	125
83-86	743	102	311	184	92	330	146	7950	142
89-92	787	102	330	197	99	356	159	10160	181
95-102	845	108	362	216	108	381	178	13716	245