


Mild Steel Forged Eye Bolts with Collar

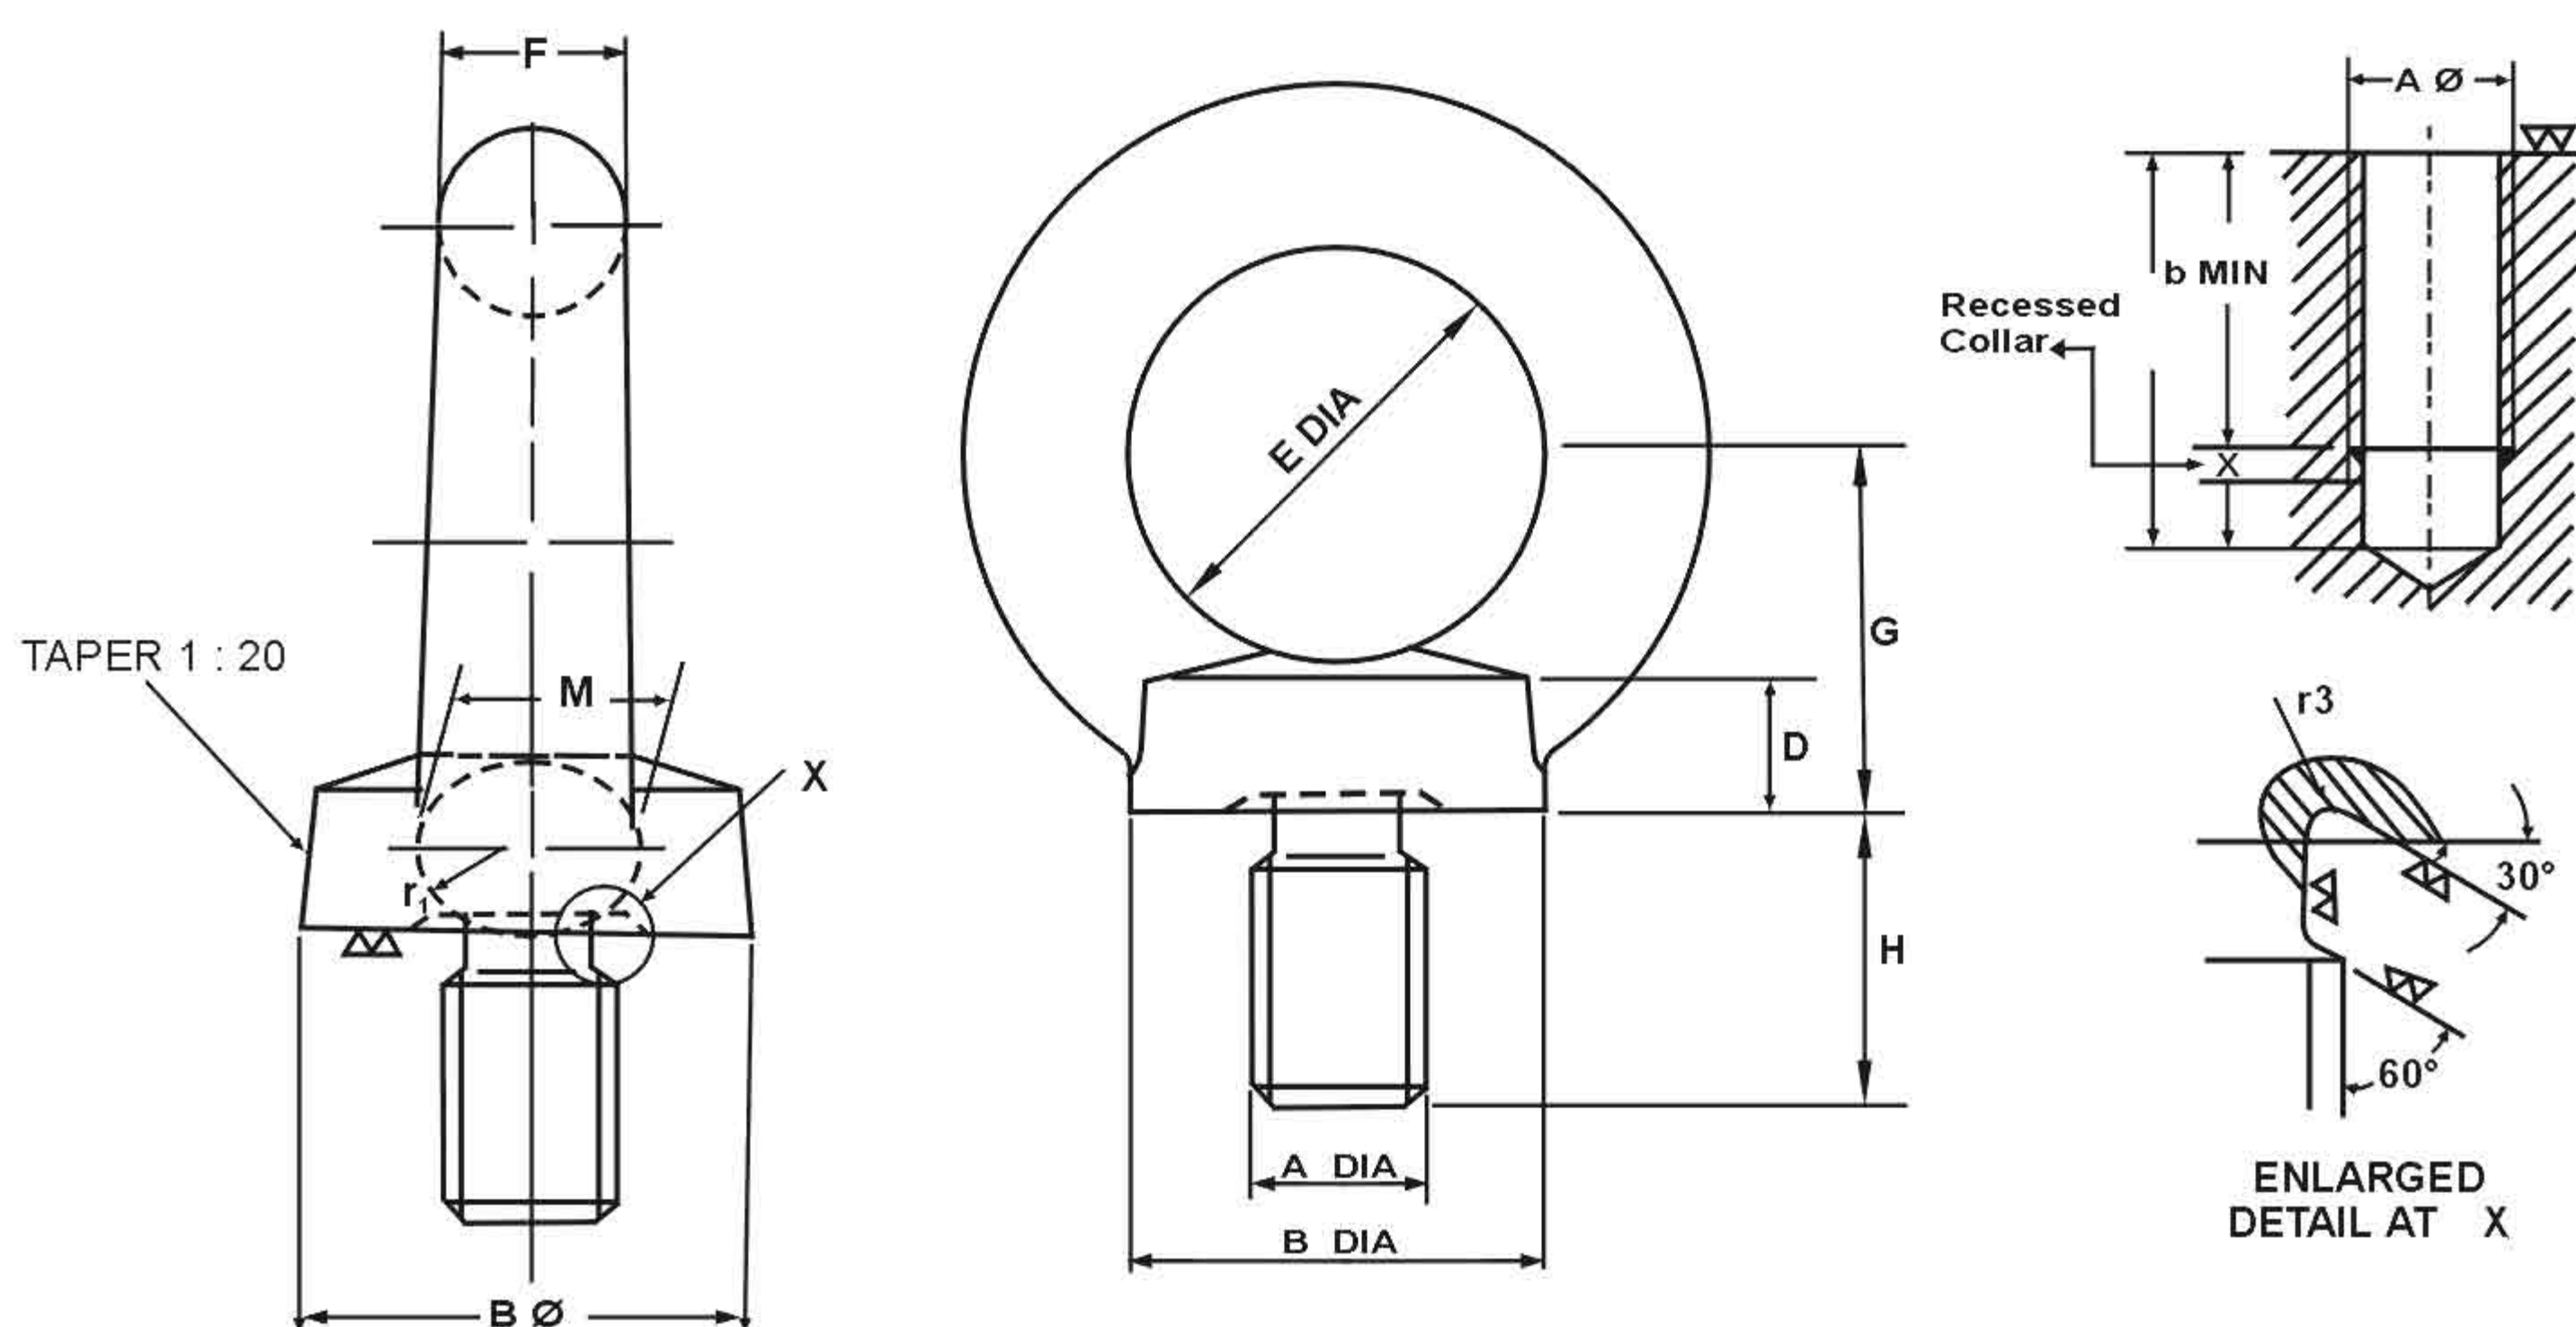

S. W. L. At 0° Kg.	Size Dia. A	Coarse Pitch	B	D	E	F	G	H	M	Approx weight each kg.
85	8	1.25	20	6	20	8	18	12	10	0.06
150	10	1.50	25	8	25	10	22	18	12	0.11
220	12	1.75	30	10	30	12	26	22	14	0.18
380	16	2.00	35	12	35	14	30	28	16	0.28
570	20	2.50	40	14	40	16	35	30	19	0.44
810	22	2.50	45	16	45	18	40	35	21	0.55
1,050	24	3.00	50	18	50	20	45	38	24	0.74
1,700	30	3.50	65	22	60	24	55	45	28	1.66
2,500	36	4.00	75	26	70	28	65	55	32	2.7
3,400	42	4.50	85	30	80	32	75	65	38	4.0
5,200	48	5.00	100	35	90	38	85	70	46	6.4
6,500	56	5.50	110	38	100	42	95	80	50	8.8
8,700	64		120	42	110	48	105	90	58	
13,000	72		150	50	140	60	130	105	72	
17,000	80		170	55	160	68	150	120	80	
20,000	100		190	60	180	75	165	130	88	

Dimensions in Millimeters

Proof load = 2 x S. W. L. (Safe working load)

Other threads can also be supplied to special order.